


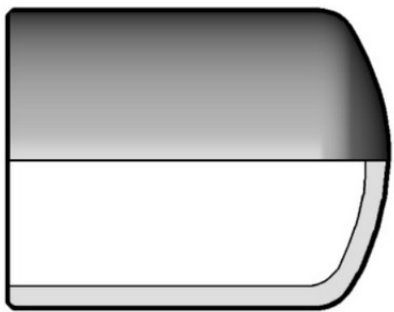

### Заглушка для стыковой сварки PP-H FIP d90 SDR11 PN6

| Артикул  | d    | l   | S    | Z   | g     |
|----------|------|-----|------|-----|-------|
| CBM17063 | 63   | 62  | 3,6  | 85  | 70    |
| CBM17090 | 90   | 79  | 5,1  | 110 | 190   |
| CBM17125 | 125  | 95  | 7,1  | 124 | 160   |
| CBM17140 | 140  | 110 | 8    | 140 | 180   |
| CBM17160 | 160  | 121 | 9,1  | 152 | 400   |
| CBM17200 | 200  | 140 | 11,4 | 184 | 690   |
| CBM17225 | 225  | 160 | 12,8 | 200 | 960   |
| CBM17250 | *250 | 160 | 14,2 | 230 | 1500  |
| CBM17315 | *315 | 171 | 17,9 | 262 | 2900  |
| CBM17355 | *355 | -   | 20,1 | 55  | 4170  |
| CBM17400 | *400 | -   | 22,7 | 60  | 5960  |
| CBM17450 | *450 | -   | 25,5 | 70  | 8520  |
| CBM17500 | *500 | -   | 28,4 | 75  | 11600 |
| CBM17560 | *560 | -   | 31,7 | 80  | 16000 |
| CBM17630 | *630 | -   | 35,7 | 90  | 22900 |
| CBM17710 | *710 | -   | 40,2 | 120 | 33500 |
| CBM17800 | *800 | -   | 45,3 | 130 | 47500 |
| CBM11020 | 20   | 35  | 1,9  | 45  | 10    |
| CBM11025 | 25   | 40  | 2,3  | 52  | 10    |
| CBM11032 | 32   | 44  | 2,9  | 58  | 20    |
| CBM11040 | 40   | 50  | 3,7  | 67  | 30    |
| CBM11050 | 50   | 55  | 4,6  | 75  | 50    |
| CBM11063 | 63   | 62  | 5,8  | 85  | 90    |
| CBM11075 | 75   | 63  | 6,8  | 95  | 130   |
| CBM11090 | 90   | 79  | 8,2  | 110 | 230   |
| CBM11110 | 110  | 88  | 10   | 127 | 400   |
| CBM11125 | 125  | 94  | 11,4 | 130 | 520   |
| CBM11140 | 140  | 99  | 12,7 | 142 | 695   |
| CBM11160 | 160  | 109 | 14,6 | 162 | 1040  |

|          |      |     |      |     |       |
|----------|------|-----|------|-----|-------|
| CBM11180 | 180  | 141 | 16,4 | 191 | 730   |
| CBM11200 | 200  | 127 | 18,2 | 181 | 1060  |
| CBM11225 | 225  | 129 | 20,5 | 205 | 2625  |
| CBM11250 | *250 | -   | 22,7 | 50  | 1840  |
| CBM11280 | *280 | -   | 25,4 | 55  | 2560  |
| CBM11315 | *315 | -   | 28,6 | 60  | 3600  |
| CBM11355 | *355 | -   | 32,2 | 65  | 5040  |
| CBM11400 | *400 | -   | 36,3 | 70  | 7240  |
| CBM11450 | *450 | -   | 40,9 | 80  | 10200 |
| CBM11500 | *500 | -   | 45,4 | 85  | 14000 |
| CBM17075 | 75   | 63  | 4,3  | 95  | 100   |
| CBM17110 | 110  | 88  | 6,3  | 127 | 300   |
| CBM17180 | 180  | 134 | 10,2 | 169 | 500   |
| CBM17280 | *280 | 162 | 15,9 | 257 | 2100  |